


## Wrap-around Nosing, Flush mounted VNB

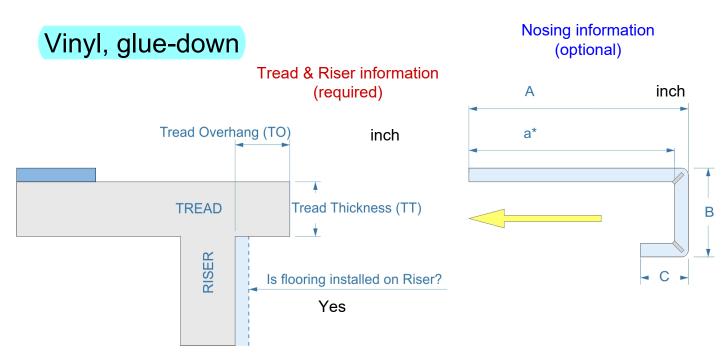

- 1. Only enter Tread & Riser information in the left section of the drawing unless special nosing size is required.
- 2. A is the top width. A is normally the balance of the plank width, A = (Plank width) B C. Do not provide A unless special size is required.
- a\* is the restricted top width measured from the visible top surface of the adjacent plank to the tread edge. This is an
  optional dimension *only* required if the nosing is to fit a previously installed adjacent plank. Do not provide a\* if either
  Tread Overhang or A is provided.
- 4. **B** is the face (drop) size. Do not provide **B** if **Tread Thickness** is provided or special **B** size is required.
- C is the return depth. Do not provide C if Tread Overhang is provided. Tread Overhang is measured from the tread edge to the riser with no flooring installed. C = 7/8" when flooring is installed on the Riser. C=7/8"+(Flooring Thickness) when no flooring is installed on the riser.
- 6. Use separate order sheets for different nosing profiles.

		Required by	
Your Name		Planks in a box	planks
Purchase Order		Plank width	inch
Tag		Plank length	inch
Length, " Quantity x	Length, "Quantity x	Total length ordered Total Quantity	LF nosings
x	х		
X	х		
х	Х		

. .